


Figure 2

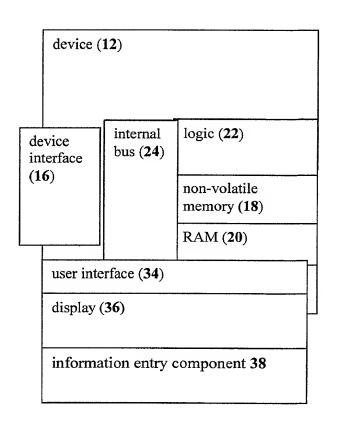

user selects at least one type of data for transfer (stage 1) selected data is marked with at least one type of permission (stage 2) device is optionally notified of the possibility of connection to another device (stage 3) device according to the present invention becomes connected to another device (stage 4) data transfer is initiated (stage 5)